


# MBB C 1000 S



Robust, dependable and efficient

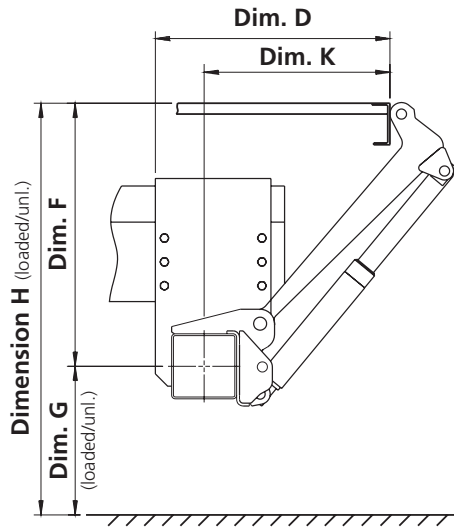

## Weights

### C 1000 S

| Platform type        | Alum. |
|----------------------|-------|
| Platform width (mm)  | 2450  |
| Platform height (mm) | 2050  |
| Unit weight (kg)     | 401   |
| Adds to vehicle (mm) | 203*  |

\* Does not include seal kit or pressing

## Dimensions


|                          |  | C 1000 S   |
|--------------------------|--|------------|
| <b>Lift arms (in mm)</b> |  | <b>700</b> |
| H (max.)                 | Loading height unloaded                            | 1256       |
| H (min.)                 | Loading height loaded                              | 906        |
| F (max.)                 | Middle of main beam to upper edge of loading floor | 728        |
| K (min.)                 | At dimension F (max.)                              | 515        |
| D (min.)                 | Installation space (min.)                          | 665        |
| F (min.)                 |  | 529        |
| K (max.)                 | At dimension F (min.)                              | 710        |
| D (max.)                 | Installation space (max.)                          | 860        |

## Technical data

|                                   |  | C 1000 S                              |
|-----------------------------------|--|---------------------------------------|
| Lifting capacity                  |  | 1000 kg                               |
| Main beam                         |  | 180 x 180 mm                          |
| Lifting gear hydraulics           |  | 2 x lift cylinder / 2 x tilt cylinder |
| Platform overlap with floor       |  | -57 mm                                |
| Lift arm pitch                    |  | 1310 mm                               |
| Load centre - lengthwise          |  | 700 mm                                |
| Load centre - across centre       |  | 50 % of the full load on one side     |
| Inclination angle of the platform |  | +90° to -10°                          |

## Diagram

| C 1000 S |        |
|----------|--------|
| a (mm)   | Q (kg) |
| 700      | 1000   |



Disclaimer: The specified weights refer to the lightest platforms of the corresponding height. Dimensions may vary. Specifications subject to change without notice.

**FEATURES:** Fixed control • pendant control • platform auto levelling • roll stops  
• flashing lights • foot controls

**PALFINGER AUSTRALIA**

**PHONE: 13 27 26**

palfinger.com.au info@palfinger.com.au



MELBOURNE • SYDNEY • NEWCASTLE • BRISBANE • PERTH